



# HDMI-VGA v1.0

## HDMI-VGA signal converter



Edition: 1 from 01.06.2017  
Supercedes the edition: -----

EN



### 1. Technical description.

The HDMI-VGA signal converter allows connecting devices (DVRs/NVRs) equipped with HDMI sockets to monitors using only a VGA (D-Sub) input.


The device requires power, which is supplied directly from the DVR's USB port (the cable is attached to the converter).

In addition to the image, the converter also allows sending audio to an external source (e.g. active speakers, audio amplifier). For this purpose, the 3.5 "mm jack is used.

### 2. Technical parameters.

Code	HDMI-VGA
<b>Video output</b>	1 x HDMI (outlet) (HDMI 1,3) (HDCP 1,4)
<b>Video output / supported resolutions</b>	1 x VGA 640x480@60/72/75/85Hz; 800x600@60/72/75/85Hz 1024x768@60/70/75/85Hz; 1152x864@75Hz; 1280x720@60Hz 1280x768@60Hz; 1280x800@60Hz 1280x960@60Hz; 1280x1024@60Hz 1360x768@60Hz; 1440x1050@60Hz 1440x900@60Hz; 1680x1050@60Hz 1600x1200@60Hz; 1920x1080@60Hz
<b>Audio output</b>	1 x 3,5mm Jack (outlet)
<b>Power input</b>	1 x USB (mini) (outlet)
<b>Operation temperature</b>	-10°C ÷ 40°C
<b>Storage temperature</b>	-20°C ÷ 60°C
<b>Permissible relative humidity</b>	relative humidity 10÷90% without condensation
<b>Dimensions</b>	66 × 55 × 20mm
<b>Net / gross weight</b>	0,05 / 0,07kg
<b>Declarations, warranty</b>	CE, one year from the production date

Fig. 1. Scheme of use of HDMI-VGA converter.

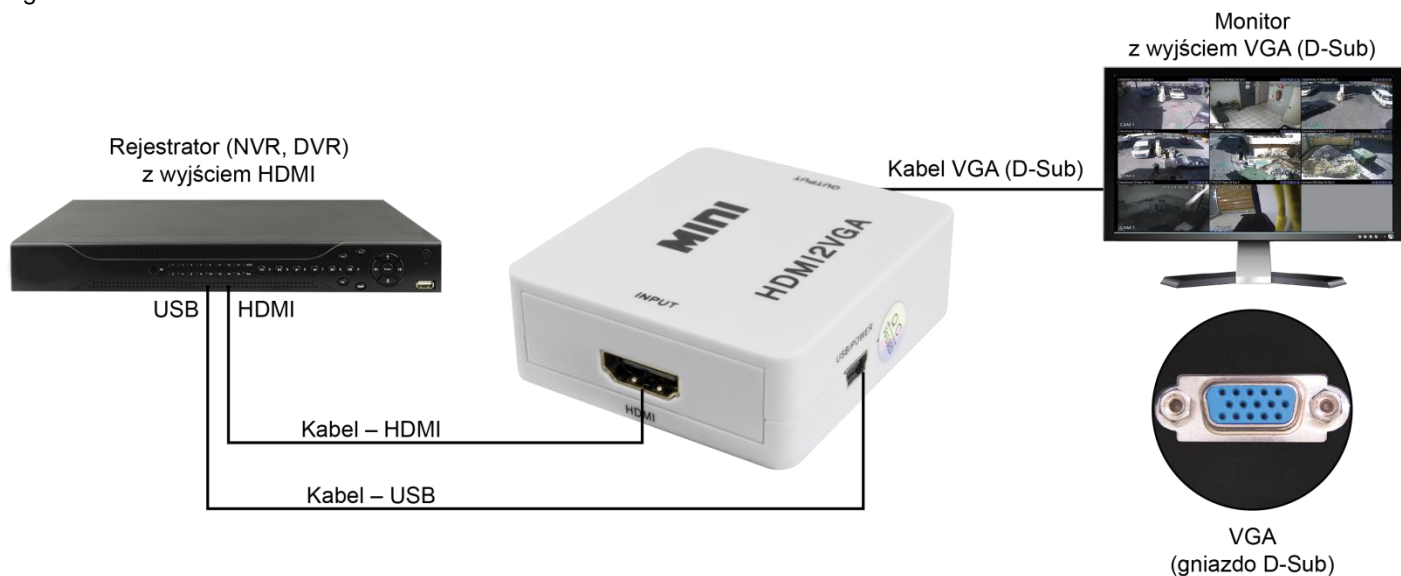

**WEEE LABEL**

Waste electrical and electronic equipment must not be disposed of with normal household waste. According to the European Union WEEE Directive, waste electrical and electronic equipment should be disposed of separately from normal household waste.

**Pulsar**

Siedlec 150, 32-744 Łapczyca, Poland  
Tel. (+48) 14-610-19-40, Fax. (+48) 14-610-19-50  
e-mail: [biuro@pulsar.pl](mailto:biuro@pulsar.pl), [sales@pulsar.pl](mailto:sales@pulsar.pl)  
http:// [www.pulsar.pl](http://www.pulsar.pl), [www.zasilacze.pl](http://www.zasilacze.pl)