

DS-2XM6756G1-I(D)(M)(/ND)
Mobile Dome Camera



- High quality imaging with 5MP resolution
- 2/2.8/4 mm fixed lens
- Clear imaging against strong back light based on 120 dB WDR technology
- Water and dust resistant (IP67) and vandal resistant(IK10)

▪ Specification

| Camera | |
|------------------------|--|
| Protection Level | IP67, IK10 |
| Min. Illumination | 0.002Lux @ (F1.6, AGC ON), 0lux with IR |
| Resolution | 5MP |
| Shutter Speed | 1/3 s to 1/100,000 s |
| P/N | PAL: 25fps NTSC: 30fps (30fps is not supported under 2560 × 1920 main code stream) |
| Day & Night | IR Cut Filter |
| Angle Adjustment | Pan:-30°~+30°, Tilt: 0°~75°, Rotate: 0°~ 360° |
| Sensor Type | 1/2.8" CMOS Progressive Scan |
| White Balance | Support 4 white balance configurations: fluorescent lamp, incandescent lamp, warm lamp and natural light; Support manual/automatic white balance adjustment. |
| Lens | |
| Focal Length | 2mm/2.8mm/4mm |
| Focal Length & FOV | 2 mm, horizontal FOV 122°, vertical FOV 93°, diagonal FOV 152° 2.8 mm, horizontal FOV 95°, vertical FOV 69°, diagonal FOV 126° 4 mm, horizontal FOV 78°, vertical FOV 55°, diagonal FOV 105° |
| Lens Mount | M12 |
| Focus | Manual focus |
| Max. Aperture | 2mm:F2.25 2.8 /4mm: F1.6 |
| Illuminator | |
| Supplement Light Type | Infrared fill light lamp |
| Smart Supplement Light | Support |
| IR Wavelength | 850nm |
| IR Range | Up to 30m |
| Video | |
| Max. Resolution | 2560 × 1920 |
| Main Stream | Third Stream ON: 50Hz: 25 fps (2560 × 1920, 1920 × 1080, 1280 × 960, 1280 × 720) 60Hz: 30 fps (1920 × 1080, 1280 × 960, 1280 × 720) Third Stream OFF: 50Hz: 25 fps (2560 × 1920, 1920 × 1080, 1280 × 960, 1280 × 720) 60Hz: 30 fps (2560 × 1920, 1920 × 1080, 1280 × 960, 1280 × 720) |
| Sub-Stream | Third Stream ON: 50Hz: 25 fps (704 × 576, 640 × 480, 352 × 288, 320 × 240) 60Hz: 30 fps (704 × 576, 640 × 480, 352 × 288, 320 × 240) Third Stream OFF: 50Hz: 25 fps (704 × 576, 640 × 480, 352 × 288, 320 × 240) 60Hz: 30 fps (704 × 576, 640 × 480, 352 × 288, 320 × 240) |

| | |
|-----------------------------|--|
| Third Stream | Third Stream ON: 50Hz: 25 fps (1280 × 720) 60Hz: 30 fps (1280 × 720) Third Stream OFF: 50Hz: 25 fps (0) 60Hz: 30 fps (0) |
| Video Compression | Main stream: H.264, H.265, H.264+, H.265+ Sub-stream: H.264, H.265, MJPEG, H.264+, H.265+ Third stream: H.264, H.265 ,H.264+, H.265+ |
| Video Bit Rate | Main Stream: 512 Kbps to 16384Kbps Sub-Stream: 256 Kbps to 4096Kbps Third Stream: 512 Kbps to 6144Kbps |
| H.264 Type | Baseline Profile/Main Profile/High Profile |
| H.265 Type | Main Profile |
| Bit Rate Control | Constant Bit Rate, Variable Bit Rate |
| Stream Type | Main stream, sub stream, third stream |
| Scalable Video Coding (SVC) | H.264 and H.265 encoding |
| Region Of Interest (ROI) | Support 2 fixed region for (main/sub) stream |
| Audio | |
| Audio Compression | G711U, G711A, G726, AAC, G722, PCM, AAC |
| Audio Bit Rate | Raw data PCM:256kbps G711U, G711A, G726_A, AAC,G722.1:≤64kbps |
| Audio Sampling Rate | 16 kHz |
| Environment Noise Filtering | Yes |
| Network | |
| Protocols | TCP/IP,HTTP,HTTPS,DHCP,DNS,DDNS ,RTSP,SNMP,QOS,FTP,RTCP,NTP,UPNP,SMTP,IGMP,ICMP,IPV6,UDP,SSL/TLS |
| Simultaneous Live View | Up to 8 channels |
| API | ONVIF (PROFILE S, PROFILE G, PROFILE T), ISAPI, SDK |
| User Management | Up to 16users, 3 levels: Administrator, Operator and User |
| Web Browser | IE8+, Chrome45+, Edge41+, Firefox45+ |
| Image | |
| Wide Dynamic Range (WDR) | 120 dB |
| Image Settings | Support rotation mode. Brightness, contrast, saturation and sharpness can be adjusted by browser and client software. |
| Day/Night Switch | Day/Night/Auto/Schedule |
| SNR | > 50 dB |
| Image Enhancement | BLC, HLC, 2DNR ,3DNR |
| Privacy Mask | Enables configuration, and supports drawing of up to 4 areas |
| Picture Overlay | Support image overlay, uploading images, enabling, coordinates, etc. |
| Target Cropping | Support (only the third stream) |
| Backlight Compensation(BLC) | Support up, down, left, right, center and custom backlight compensation adjustment |
| Interface | |
| Video Output | Not supported |
| Ethernet Interface | -ID: 1 RJ45 10M/100M self-adaptive Ethernet port -IM/ND, IDM: 1 four-core M12 aviation plug |

| | |
|----------------------------------|--|
| Audio | 1 built-in mic, mono sound |
| Reset Key | Support |
| Interface Type | Interpolate |
| TF Card Storage | Built-in Micro TF Slot, up to 256 GB(not for baseline. Note the Micro-TF card capacity when ordering) |
| Event | |
| Linkage Method | Upload to FTP, notify monitoring center, send email, trigger recording |
| Basic Event | Motion detection, video tampering alarm |
| Smart Event | Line crossing detection, Intrusion detection, Region entrance detection, Region exiting detection, Unattended baggage detection, Object removal detection, Object detection: detects faces and upload images Scene change detection, defocus detection, Loitering Detection, People Gathering Detection, Fast Moving Detection, Parking Detection, |
| General | |
| Product Dimension | Camera: Φ 110 mm \times 57.4 mm (4.3" \times 2.26") |
| Power | PoE:0.30 A to 0.20 A, max: 7.5W DC: 0.83A to 0.21A,max:7.5W |
| Camera Material | Metal |
| Package Dimension | 252 mm \times 160 mm \times 95 mm (9.9" \times 6.3" \times 3.7") |
| Product Weight | Approx. 452 g (1 lb.) |
| Startup and Operating Conditions | -30 °C to 75 °C (-22 °F to 167°F), humidity less than 95% or less (non-condensing) |
| Language | English, French, German, Russian, Italian, Korean, Portuguese, Spanish, Turkish, Polish, Czech |
| General Function | Anti-flicker, heartbeat, mirror |
| Software Reset | Support |
| Power Supply | -ID: 9-36V& PoE (802.3af, 36 V to 57 V) -IDM: 9-36V& PoE (802.3af, 36 V to 57 V) -IM/ND: PoE (802.3af, 36 V to 57 V) |
| Power Interface | -ID: Φ 5.5 mm coaxial power plug, DC power supply, or PoE power supply -IM/ND: 4-core M12 aviation plug, PoE power supply |
| Cable Length | 50 cm |
| Selection Parameter | |
| Wi-Fi Support | Not supported |
| POE Support | PoE (802.3af) |
| Approval | |
| Class | Class B |

| | |
|------------------------------|---|
| EMC | <p>FCC: FCC-SDoC(ANSI C63.4,FCC Part15 sub B)</p> <p>CE: CE-EMC(EN 55024:2010 +A1:2015,EN 55032:2015,EN 61000-3-2:2014,EN 61000-3-3:2013)</p> <p>RCM: AS/NZS 60950.1:2003 + Am1, Am2 and Am3,AS/NZS CISPR 32:2015IC: ICES-003 Issue 7:2020</p> <p>KC: KN32:2015,KN35:2015</p> |
| Safety | <p>UL: UL 60950-1:2014,CAN/CSA C22.2 No. 60950-1-07:2014</p> <p>CB: IEC 60950-1CE:</p> <p>CE-LVD(EN 60950-1:2006+A11:2009+A1:2010+A12:2011+A2:2013)</p> <p>LOA: SANS IEC60950-1</p> <p>BIS: IS 13252(Part 1)2010+A1:2013+A2:2015</p> |
| Environment | <p>CE: CE-RoHS(RoHS Directive 2011/65/EU+2015/863)</p> <p>WEEE: 2012/19/EUReach SVHC: Regulation (EC) No 1907/2006</p> <p>Reach SVHC: Regulation (EC) No 1907/2006</p> |
| Electrical Safety Protection | IK10(IEC 62262:2002) |
| Automotive and Railway | <p>EN50155-2017(EN 50155:2017, EN 50121-3-2:2016, IEC 60068-2-1:2007, IEC 60068-2-2:2007, IEC 60068-2-30:2005, IEC 61373:2010);</p> <p>EN45545 (EN 45545-2:2013+A1:2015);</p> <p>E-MARK (ECE R10)</p> |

▪ Wiring

Cable Interfaces

| Model | Interface Type | Interface Form | Interface Definition | Interface Illustration |
|-------|----------------|----------------|--|------------------------|
| XM67 | ID | RJ45/F | 1.IPC_TX+ 2.IPC_TX- 3.IPC_RX+ 4.IDLE4 5.IDLE5 6.IPC_RX- 7.IDLE7 8.IDLE8 | |
| | | DC/F | Core: IPC_POWER Shell: IPC_GND | |
| | IDM | M12D4F | 1.IPC_TX+ 2.IPC_RX+ 3.IPC_TX- 4.IPC_RX- | |
| | | MOLEX-2M | 1.IPC_POWER 2.IPC_GND | |
| | IM/ND | M12D4F | 1.IPC_TX+ 2.IPC_RX+ 3.IPC_TX- 4.IPC_RX- | |

▪ Available Model


DS-2XM6756G1-ID(2mm)(AE)

DS-2XM6756G1-IM/ND(2mm)(AE)

DS-2XM6756G1-IM/ND(2.8mm)(AE)

DS-2XM6756G1-IDM(2.8mm)(AE)

▪ Dimension

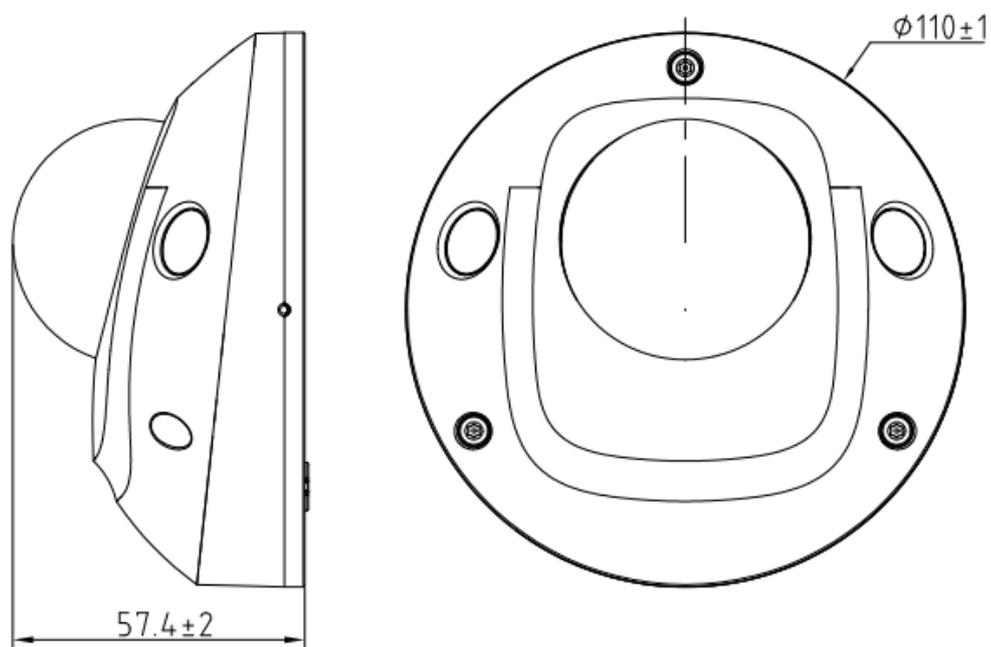

See Far, Go Further



www.hikvision.com
support@hikvision.com

