


**DS-D40CE11-2F****Flex II 250\*250 Cabinet Structure**

- Multiple dimensions: Cabinets with various dimensions can be flexibly used to meet a variety of plane and three-dimensional stitching needs.
- Light and ultra-thin cabinets: Ultra-thin and die casting aluminum cabinets are light and beautiful, which can help to deliver quickly.
- Delicate frame: 45 degree frame structure with intensive design enhances the possibility of 90 degree right-angle of creative shapes installation. It can be used with more curved and creative stitching forms. There is no need to customize.
- Magnetic module: Standard lamp boards with precise locating structure and strong magnetic adsorption without bottom shell can benefit efficient installation and convenient maintenance.
- Rotate to install: Support cabinet and module 90 degree rotating installation and horizontal and vertical stitching of cabinets. No chromatic aberration in viewing angle.
- Excellent display effect: Support high definition display and color reproduction, high contrast ratio and high refresh rate. Adopt Hikvision's dynamic engine algorithm for automatic screen control. The image is soft and comfortable to view.
- Intelligent control system: More intelligent with Hikvision's control system. Signal backup, intelligent operation and maintenance facilitate convenient operation and control. Support cloud management and maintenance.
- High quality: Obtained TUV-CE/ROHS/CB compliance certification. The cabinet is safe, reliable, energy-saving and environmentally friendly.

## ▪ Specification

Product Type	
Product Type	LED Display Structure
Cabinet	
Dimensions (W × H × D)	250 mm × 250 mm × 50 mm (9.843" × 9.843" × 1.969")
Area	0.0625 m <sup>2</sup>
Cabinet Material	Aluminium die casting
Processing Performance	
Display Color	281 trillion
Power	
Input Voltage	110~220 VAC ± 15%
Working Environment	
Working Temperature	-20 °C to +45 °C (-4 °F to +113 °F)
Working Humidity	10%~90%RH (No condensation)
Storage Humidity	10%~90%RH (No condensation)
Storage Temperature	-40 °C to +60 °C (-40 °F to +140 °F)
General	
Package Dimension (W × H × D)	334 mm × 314 mm × 95 mm (13.15" × 12.35" × 3.74") (Carton , 1 cabinet in 1 box) 692 mm × 505 mm × 340 mm (27.24" × 19.88" × 13.39") (Carton , 10 cabinets in 1 box)
Packing List	Regulatory Compliance and Safety Information × 1 Connecting screws, light beads, driver IC, iron sheets
Net Weight	0.880 kg (1.94 lb)
Gross Weight	4.285KG


## ▪ Typical Application

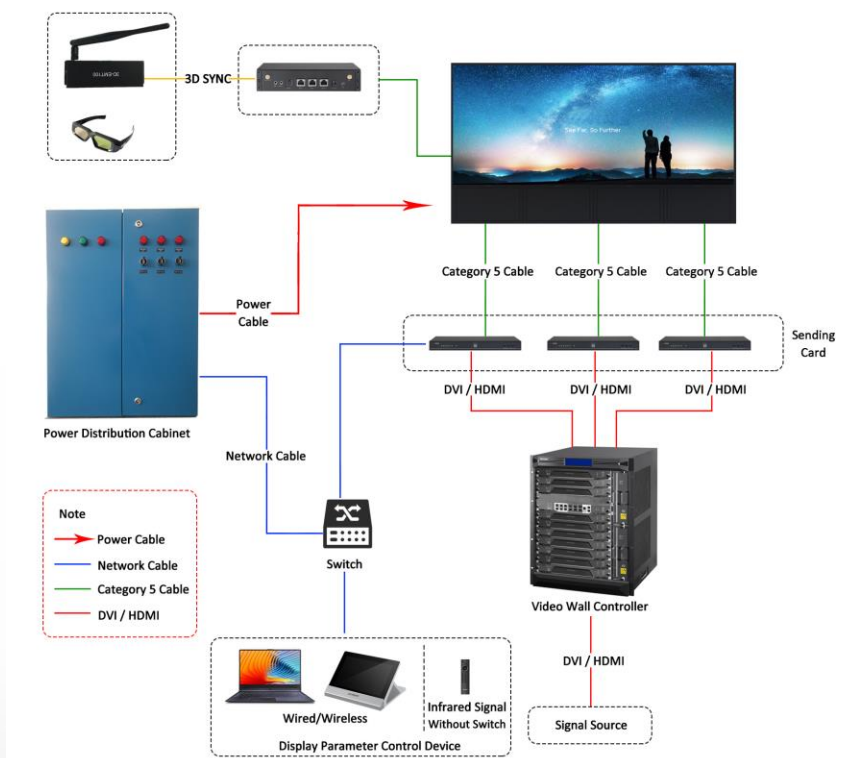


▪ **Available Model**

DS-D40CE11-2F 250\*250 Cabinet Structure

▪ **Dimension**

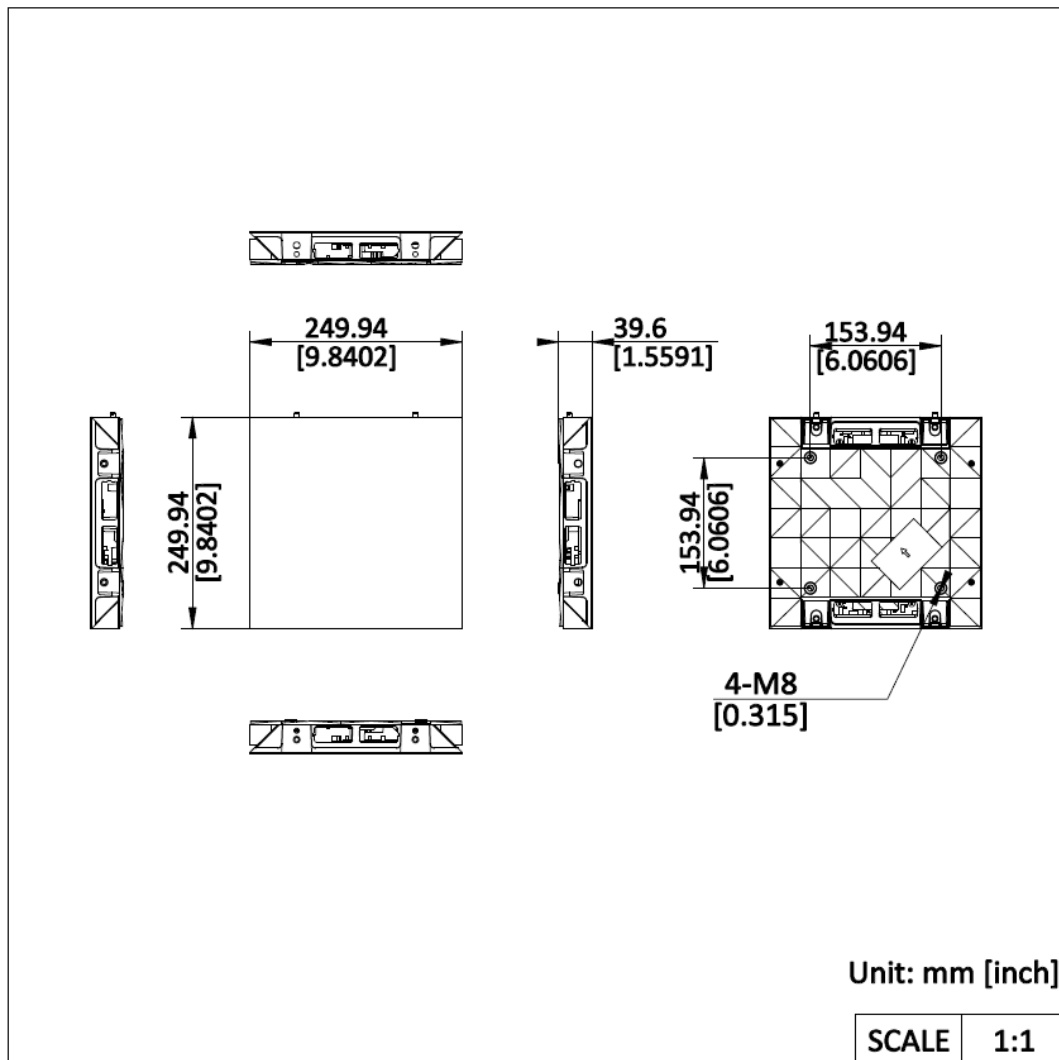



▪ **Accessory**

▪ **Optional**

DS-D4039CEXX-2F	DS-D4019CEXX-2F	DS-D4026CEXX-2F	DS-D40CE-2F/PC	DS-D40CX-1F/H4
				
DS-1NP6UEC0	DS-D4019CX-1F/M	MCP200WS-4.5A-B	DS-D40CX-1F/R	DS-D40CX-1F/PC
				

# See Far, Go Further



[www.hikvision.com](http://www.hikvision.com)  
[support@hikvision.com](mailto:support@hikvision.com)

