

# 1.4

## Surface-mounting magnetic contacts

Series 405



EN50131-2-6 GR1 CL II

- Complies with EN50131-2-6
- Surface mounting
- Suitable for doors and windows of any material
- Terminal connection
- Available in white and brown

## Series 405

### Thermoplastic magnetic contact


Thermoplastic magnetic contact for surface mounting. It is suitable for door/window frames of any material: aluminium, wood, PVC, iron etc.

Clamp connections, available in white and brown

### Series 415

Housing material	Thermoplastic in colours as per table
Operation	Reed contact with NC output with near magnet
Type of connection	Terminals
Operating temperature	-10°C to +40°C
Protection rating	IP 40

### Dimensions

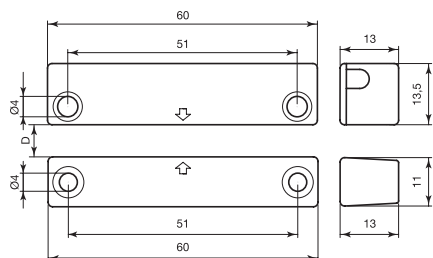

### Order codes

Code	D max (no iron)	D max (on iron)	Connection type	Max voltage	Max current	Max power	N° wires	Cable length	Colour	Safety grade	Environmental class	Package weight	Notes
405-M	15 mm	11 mm	NC *	42.4 V <sub>peak</sub> - 60 V <sub>DC</sub>	1 A	10 W	2 terminals	-	white	1	II	0.19 Kg	
405-M-M	15 mm	11 mm	NC *	42.4 V <sub>peak</sub> - 60 V <sub>DC</sub>	1 A	10 W	2 terminals	-	brown	1	II	0.19 Kg	

"Safety grade" and "Environmental Class" as per European Standard EN 50131-1

D max: maximum installation distance. For other operating distances, see the instructions sheet at [www.coopercsa.it](http://www.coopercsa.it)

\* With near magnet