


CODE: **AWO350** v1.1/III  
 NAME: **LED/B**

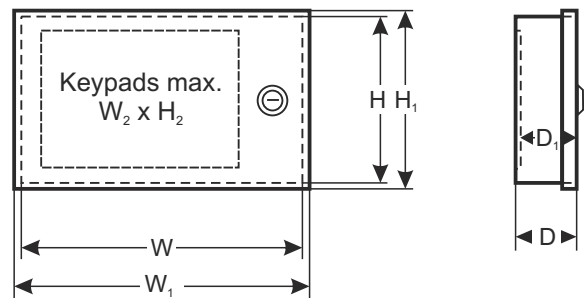

## DESTINATION

### DSC

KEYPADS: PC 500 RK, PC 1500 RK, PC1555 RK, PC 1575 RK, PC 2550 RK, PC3000 RK

### FBI

KEYPADS: XK 206, STOCK 406, 6805, XL 4600 SM, XL 4612 SM, XK7LC, XK708

### SCANTRONIC

KEYPADS: KP600L, EKP1, SIC-1L, KP 2000

### ROKONET

KEYPADS: RP 296 KLC, RP 296 KLS, RP 296 KL8, RP 296 KL16,

### PARADOX

KEYPADS: 626, 629, 633, 639

### NAPCO

KEYPADS: RP1054E, RP1016E, RP1000E, GEM-RP2AS, GEM-RP3S, GSM-RP8, GEM-RP1Cae2, GEM-RP2Ase2, GEM3Se2

### SUMMIT

KEYPADS: LED 3106, LCD 3108, PENTA

### SATEL

KEYPADS: CA5 KLCD-S

## TECHNICAL DATA

External dimensions of the enclosure: W=192, H=132, D=42 [+/- 2mm]

External dimensions of the front panel: W<sub>1</sub>=198, H<sub>1</sub>=137 [+/- 2mm]

Keyboard mounting dimensions: W<sub>2</sub>=135, H<sub>2</sub>=125, D<sub>2</sub>=32 [+/- 2mm]

Weight net/gross: 0,70kg / 0,75kg [+/-0,1kg]

Operating environment: class II, -10°C+ 40°C

Material description: sheet steel DC01, thickness: 0,7mm, protection anticorrosion, color: RAL 9003

Destination: indoor

Tamper protection: 1 x microswitch: opening, 0,5A@50V/DC max. NC- contacts

Closing: lockable (various code, two keys included)

Notes: removable back mounting plate

Declaration, warranty: RoHS, 2 year from the production date