

INSTALLATION INSTRUCTIONS ENGLISH

Code: AWO531W

Name: Enclosure DVR/Monitor/RACK/vertical white

IM531W



IP20





Edition: 1 from 25.04.2019 Supercedes the edition: -----

1. Product description

Enclosure construction is compliant with requirements of General Data Protection Regulation (GDPR), as personal data must be protected and stored securely. Surface mounted enclosure DVR/Monitor/RACK/vertical white protects recorder/monitor/switch against unauthorized access or theft. Made of 1,2 mm steel plate. In enclosure there is installed bracket with stripes for mounting recorder and another bracket for mounting monitor max. 22". Set includes: two locks (different code), two keys/each lock, mounting plate for monitor, RACK brackets - 4U, stripes for

mounting recorder, tamper switch indicating enclosure opening, screws (RAS4 – 2pcs, M4x10 - 4 pcs), three pole connector with fuse, screws for mounting power distribution unit.

Additional equipment that can be mounted inside: ARAW45 fan with thermostat and ML572 power distribution unit.

Possibility of install inside:


- Switches of S ... and SG series back enclosure
- RACK switches of SF, RS, and RSFUPS series RACK brackets
- Recorder back enclosure strips / RACK bracket
- Monitor (max 22") hinged mounting plate
- Batteries
- Power distribution unit

Main features:


- Surface mounted construction
- Removable door (convenient installation of wiring and other equipment)
- Removable mounting plate for monitor
- RACK brackets 4U
- Knock-outs and holes in the back of enclosure.
- Enclosure locked with a key.


2. Technical parameters


Dimensions:	W=585, H=650, D=261 [mm, +/-2]
	W ₁ =590 H ₁ =655, D ₁ =14 [mm, +/-2]
Dimensions of the recorder space:	W ₂ =480 H ₂ =400, D ₂ =180 [mm, +/-2]
Hinged mounting plate:	W ₃ =533 H ₃ =184, D ₃ =71 [mm, +/-2]
Position of RACK 19" profiles:	H4=475 [mm, +/-2]
Fitting battery:	4x7 Ah
Net / Gross weight:	16,7 / 18,00 [kg]
Operation conditions:	2nd environmental class, -10 °C ÷ 40 °C
Made of:	DC01 sheet, thickness: 1mm, colour: RAL9003 (white)
	- anticorrosion protection
Antisabotage protection:	microswitch: opening
	0,5 A@50 V DC max. NC- normally closed contacts
Locking:	Lock MR008 (different code) x 2 pcs
Application:	Indoor
Declarations, warranty:	RoHS, warranty – 2 years from the production date
Notes:	Distance from the wall 14mm
	RACK brackets – 4U
	The possibility of mounting ARAW45 fan with sensor
	Possibility of install monitor.

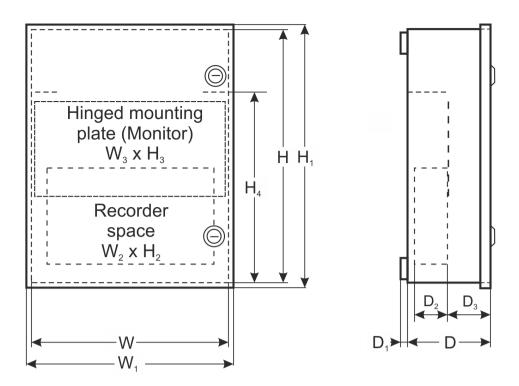

4. Example of mounting configurations.

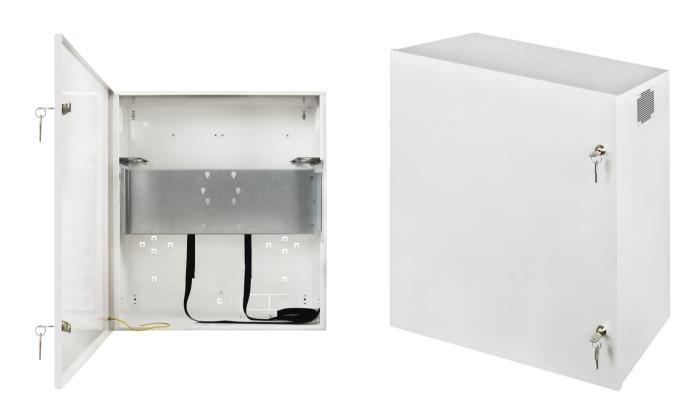

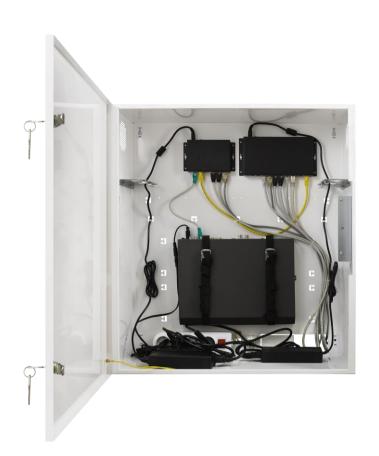

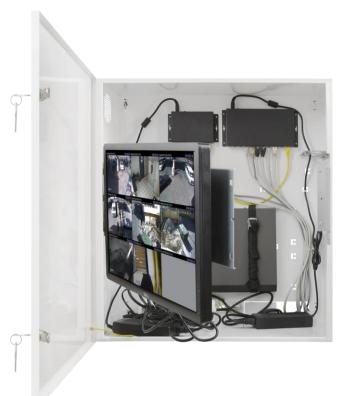





PRODUCER
Pulsar sp. j.
Siedlec 150, 32-744 Łapczyca, Poland
Tel. (+48) 14-610-19-40, Fax. (+48) 14-610-19-50
E-mail: biuro@pulsar.pl, sales@pulsar.pl
http:// www.pulsar.pl, www.zasilacze.pl