


CODE: **AWT 682** v 1.0/IX
NAME: **TRANSFORMER TRZ 60VA/18V/20V**

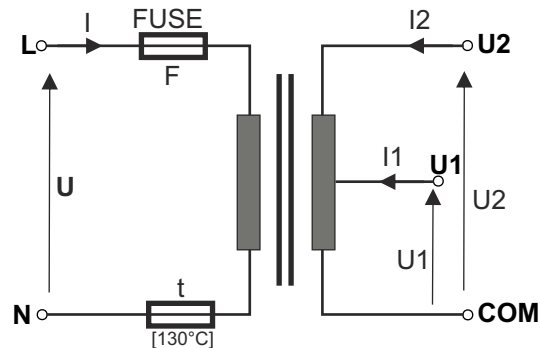

Tab.1

Technical parameters of transformers							
CODE NAME	S	U	I	U1 or U2	I1 or I2	F	t
AWT682 TRZ 60/18/20	60VA	230V/AC	0,33A	18V or 20V	3,3A or 3,0A	T 500mA/250V	130°C

DESCRIPTION

The transformers are destined for supplying devices requiring AC voltage U1 or U2.

SPECIFICATION

Casing:	PC/ABS in class UL 94 V-0, IP43
Dimensions:	Fig. 1 TRZ 60VA
Net/ gross weight:	1,37kg / 1,40kg [+/-0,1kg] TRZ 60VA
Installation:	installation bus TS35/TS35 (DIN) or cheese screw x 4 (flat surface), with the holder AWO466 for TRZ60VA
Supply voltage:	230 V/AC (-15%+10%), 50Hz
Current consumption I:	tab.1.
Output voltage U1 or U2:	tab.1.
Rated power S:	tab.1.
Rated output current I1 or I2:	tab.1.
Short-circuit protection F:	fuse tab.1.
Over-load protection t:	fuse tab.1. / temperature limit fuse 130°C-non resetable
Operating conditions:	2nd environmental class, -10°C+ 40°C, Ta 40 B
Certificates, declarations:	CE, RoHS, 2 year from the production date
Remarks:	leads on connectors AWG 24-12 2,5mm ² , screw 2,9x9,5 - 4 pcs

Dimensions of transformers series: TRZ20.../TRZ 60VA..

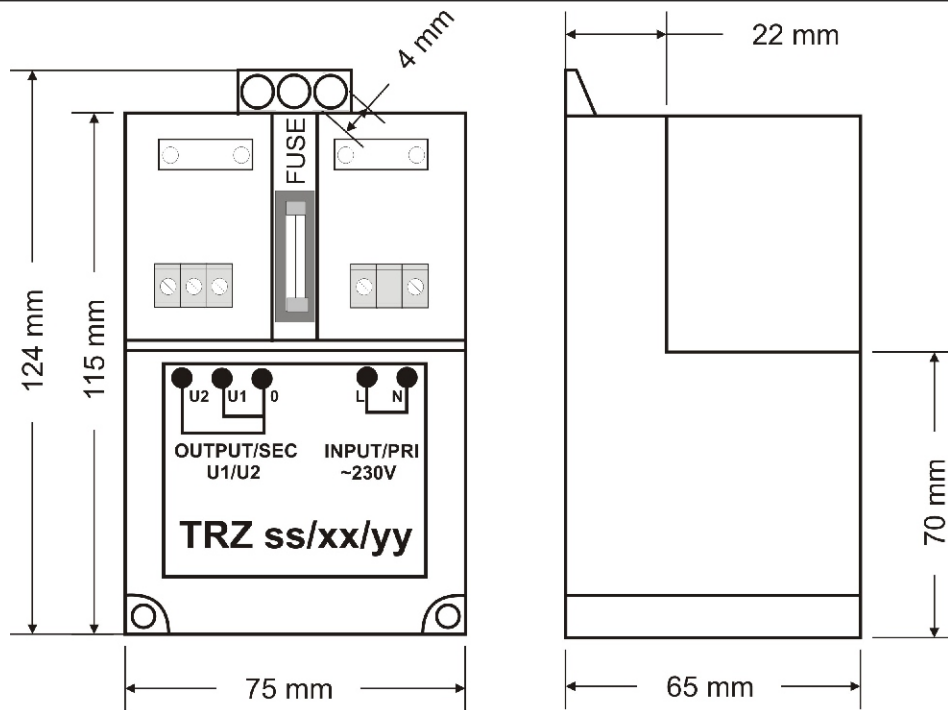


Fig.1