

DS-D5024FC-C 24-inch Monitor



- Ultra-thin device body with ultra-thin border for 3 sides.
- 2 channels of 8 bit/10 bit LVDS HD (1920*1080) display.
- 178° ultra-wide view screen.
- 3D noise reduction.
- Built-in speaker for audio input.
- Support 1 channel BNC surveillance video input with professional surveillance standard BNC interface.
- Multimedia playing of text, image, audio, video, etc.
- Support VESA wall mount.



▪ Specification

| | Model | DS-D5024FC-C |
|----------------------------|--------------------------------|---|
| Display | Screen Size | 23.8" |
| | Active Display Area | 527.04(H) mm x 296.46(V) mm |
| | Resolution | 1920 × 1080 |
| | Backlight | E-LED |
| | Pixel Pitch | 0.0915 (H) mm × 0.2745 (V) mm |
| | Brightness | 250 cd/m ² |
| | Viewing Angle | 178°/178° |
| | Color Depth | 8 bit |
| | Contrast Ratio | 4000 : 1 |
| | Response Time | 6.5 ms (typ) |
| | Refresh Rate | 60 Hz |
| | Haze | 25 % |
| | Reliability | 7 × 18 H |
| | Color Gamut | 72% |
| Interface | Video & Audio Input | HDMI × 1, VGA × 1, Audio In × 1, USB 2.0 × 1, BNC × 1 |
| Power | Power Supply | 100-240 VAC, 50/60 Hz |
| | Power Consumption | ≤ 22 W |
| | Standby Consumption | ≤ 0.5 W |
| Working Environment | Working Temperature | 0 °C to 40 °C (32 °F to 104 °F) |
| | Working Humidity | 20% to 90% RH (Non-Condensing) |
| | Storage Temperature | -20 °C to 60 °C (-4 °F to 140 °F) |
| | Storage Humidity | 10% to 90% RH (Non-Condensing) |
| General | Casing Material | Plastic |
| | VESA | 75 mm × 75 mm, 4-M6 × 6 screw holes |
| | Bezel Width | 1.9 mm (top/left/right), 23.55 mm (bottom) |
| | Product Dimensions (W × H × D) | With base: 539.1 (W) mm × 433.199 (H) mm × 43.78 (D) mm (21.22" × 17.05" × 1.88") Without base: 539.1 (W) mm × 328.325 (H) mm × 43.78 (D) mm (21.22" × 12.93" × 1.88") |
| | Package Dimensions (W × H × D) | 650 (W) mm × 475 (H) mm × 135 (D) mm (25.5" × 18.7" × 5.31") |
| | Net Weight | 3.6 ± 0.5 kg (7.9 ± 1.1 lb.) |
| | Gross Weight | 5.0 ± 0.5 kg (11.0 ± 1.1 lb.) |
| | Packing List | AC power cable × 1, base bracket × 1, user manual × 1, quick start guide × 1, HDMI cable × 1 |
| | Remarks | *The base is included by default. *The product appearance and parameters in this specification may vary from your actual device. Please consult our local sales staff for further information. |


▪ **Available Model**

DS-D5024FC-C

▪ **Physical Interface**

| Interface | Description | Interface | Description |
|--------------|---------------------------|-----------|-------------------------|
| HDMI | HDMI digital signal input | VGA | VGA analog signal input |
| AC 100-240V~ | 100-240 VAC power supply | AUDIO IN | 3.5mm Audio Input |
| USB | USB 2.0 | BNC | CVBS Signal Input |

▪ **Dimension**

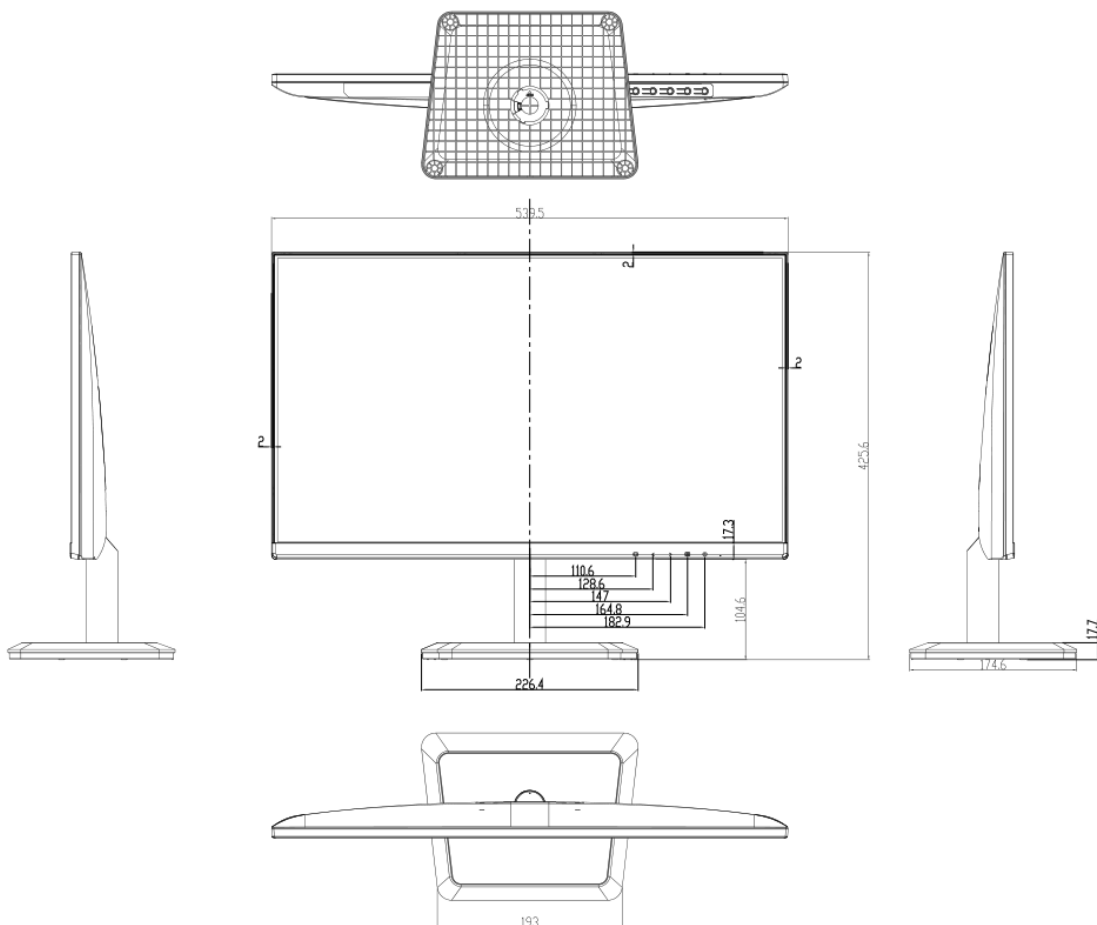

- Accessory
- Optional

DS-DM1940W
Wall-mounted
Bracket



Distributed by

**HIKVISION®****Headquarters**

No.555 Qianmo Road, Binjiang District,
 Hangzhou 310051, China
 T +86-571-8807-5998
 overseasbusiness@hikvision.com

Hikvision USA
 T +1-909-895-0400
 sales.usa@hikvision.com

Hikvision Australia
 T +61-2-8599-4233
 salesau@hikvision.com

Hikvision India
 T +91-22-28469900
 sales@pramahikvision.com

Hikvision Canada
 T +1-866-200-6690
 sales.canada@hikvision.com

Hikvision Thailand
 T +662-275-9949
 sales.thailand@hikvision.com

Hikvision Europe
 T +31-23-5542770
 sales.eu@hikvision.com

Hikvision Italy
 T +39-0438-6902
 info.it@hikvision.com

Hikvision Brazil
 T +55 11 3318-0050
 Latam.support@hikvision.com

Hikvision Turkey
 T +90 (216)521 7070- 7074
 sales.tr@hikvision.com

Hikvision Malaysia
 T +601-7652-2413
 sales.my@hikvision.com

Hikvision UK & Ireland
 T +01628-902140
 sales.uk@hikvision.com

Hikvision South Africa
 Tel: +27 (10) 0351172
 sale.africa@hikvision.com

Hikvision France
 T +33(0)1-85-330-450
 info.fr@hikvision.com

Hikvision Kazakhstan
 T +7-727-9730667
 nikia.panfilov@hikvision.ru

Hikvision Vietnam
 T +84-974270888
 sales.vt@hikvision.com

Hikvision UAE
 T +971-4-4432090
 salesme@hikvision.com

Hikvision Singapore
 T +65-6684-4718
 sg@hikvision.com

Hikvision Spain
 T +34-91-737-16-55
 info.es@hikvision.com

Hikvision Tashkent
 T +99-87-1238-9438
 uzb@hikvision.ru

Hikvision Hong Kong
 T +852-2151-1761
 info.hk@hikvision.com

Hikvision Russia
 T +7-495-669-67-99
 saleru@hikvision.com

Hikvision Korea
 T +82-(0)31-731-8817
 sales.korea@hikvision.com

Hikvision Poland
 T +48-22-460-01-50
 info.pl@hikvision.com

Hikvision Indonesia
 T +62-21-2933759
 Sales.Indonesia@hikvision.com

Hikvision Colombia
 sales.colombia@hikvision.com