

## DS-D5232F2-1V1S 32 inch FHD Monitor



- High reliable components for 7 × 24 h working
- 178° ultra-wide view screen.
- 3D noise reduction.
- Low blue light design for eye care.
- Dual interface of HDMI and VGA.
- Support VESA wall mount.


## ▪ Specification

Display	
Screen Size	32 inch
Active Display Area	698.4 (H) mm × 392.85 (V) mm
Resolution	1920 × 1080
Backlight	E-LED
Pixel Pitch	0.12125 (H) mm × 0.36375 (V) mm
Brightness	350 cd/m <sup>2</sup>
Viewing Angle	178° (H)/178° (V)
Color Depth	8 bit
Contrast Ratio	4000:1
Response Time	8 ms
Refresh Rate	Typ. 60 Hz
Haze	Haze 2%
Reliability	7 × 24 H
Color Gamut	72% NTSC
Interface	
Video & Audio Input	CVBS × 1, HDMI 1.4 × 1, DVI × 1, VGA × 1, Audio IN × 1
Video & Audio Output	Speaker (8 Ω 2 W) × 2, CVBS × 1
Data Transmission Interface	USB 2.0 × 1
Control Interface	RS232 IN × 1, RS232 OUT × 1
Power	
Power Supply	100 to 240 VAC, 50/60 Hz
Power Consumption	≤ 80 W
Standby Consumption	≤ 0.5 W
Working Environment	
Working Temperature	0 °C to 40 °C (32 °F to 104 °F)
Working Humidity	20% RH to 90% RH (Non-Condensing)
Storage Temperature	-20 °C to 60 °C (-4 °F to 140 °F)
Storage Humidity	10% RH to 90% RH (Non-Condensing)
General	
Casing Material	Plastic
VESA	200 mm × 200 mm (4 - M4 × 10 mm)
Bezel Width	11.42 mm (top/left/right), 16.98 mm (bottom)
Product Dimensions (W × H × D)	With base: 723.24 (W) mm × 533.08 (H) mm × 212.14 (D) mm ( 28.47 (W) inch × 20.99 (H) inch × 8.35 (D) inch); Without base: 723.24 (W) mm × 423.16 (H) mm × 52 (D) mm (28.47 (W) inch × 16.66 (H) inch × 2.05 (D) inch)
Package Dimensions (W × H × D)	898 (W) mm × 544 (H) mm × 153 (D) mm
Net Weight	6.15 kg ± 0.5 kg (13.56 ± 1.10 lb)
Gross Weight	8.65 kg ± 0.5 kg (19.07 ± 1.10 lb)
Packing List	Monitor × 1, Power cord (1.8 m) × 1, Base component × 1, User manual × 1, Multilingual manual × 1, Remote control × 1, Screws in 1 package, Double-end studs in 1 package

Remarks	<p>The base is included by default.</p> <p>The product appearance and parameters in this specification may vary from your actual device. Please consult our local sales staff for further information</p>
---------	-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

### ▪ Physical Interface


Interface	Description	Interface	Description
BNC IN	BNC (CVBS) signal input interface	BNC OUT	BNC (CVBS) signal output interface
HDMI IN	HDMI 1.4 digital signal input interface	DVI IN	DVI signal input interface
VGA IN	VGA analog signal input interface	AUDIO IN	3.5mm audio in input interface
USB	USB 2.0 Interface (support program upgrade and USB playback)	RS 232 IN	RS 232 IN Serial input interface
RS 232 OUT	RS 232 OUT Serial loopback output interface	POWER	Power supply indicator

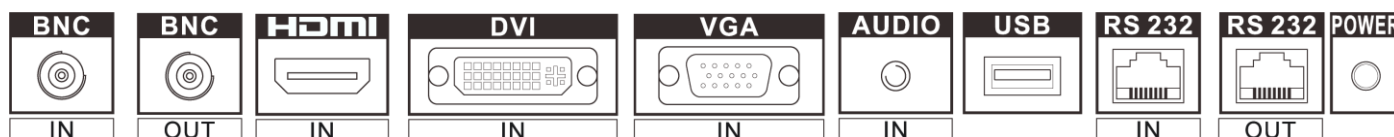

### ▪ Available Model

DS-D5232F2-1V1S

▪ Dimension

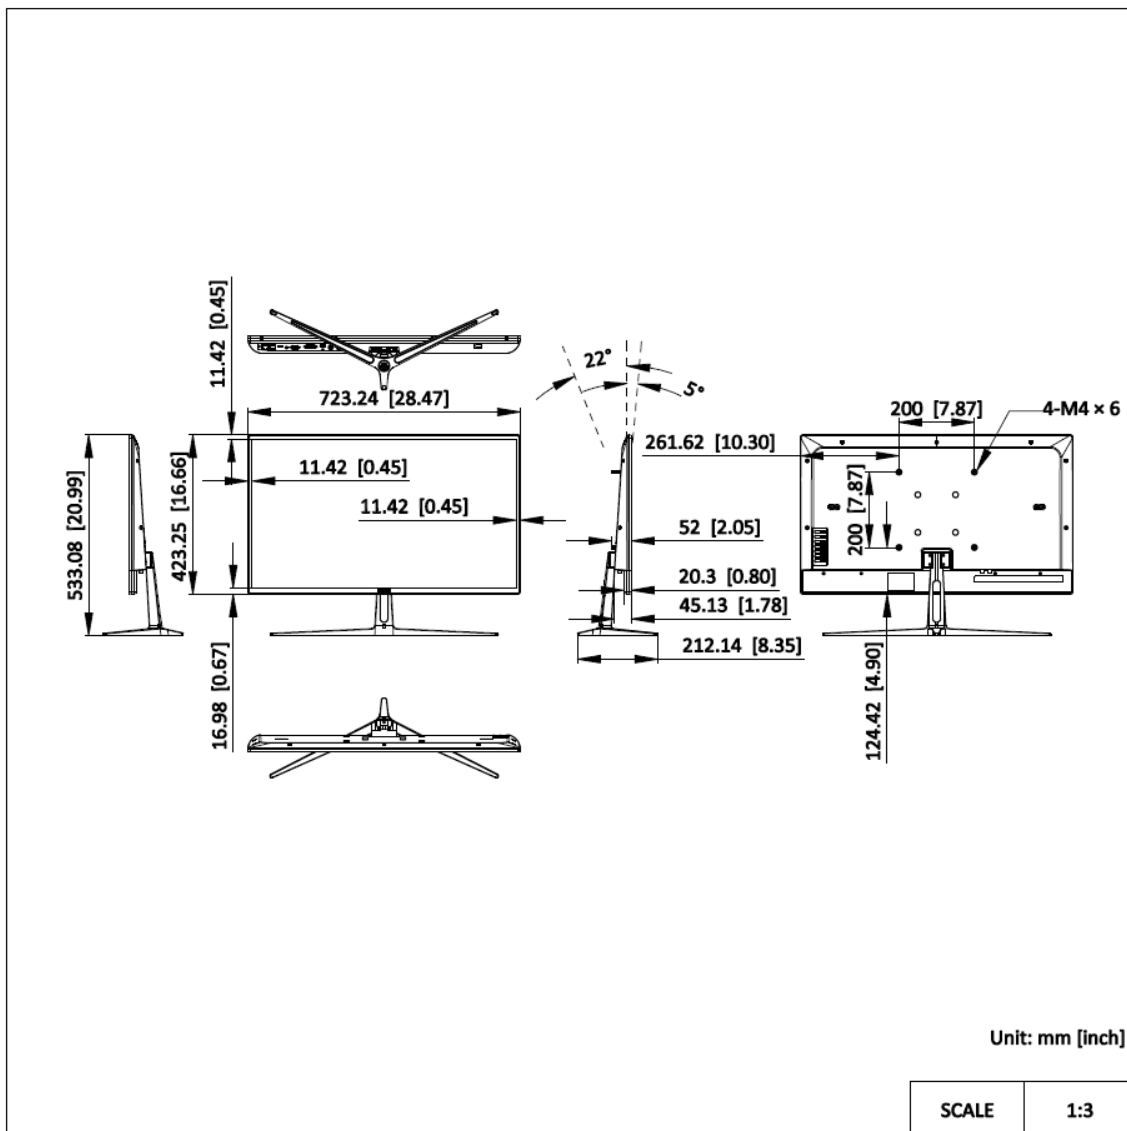

**Headquarters**

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
www.hikvision.com



Follow us on social media to get the latest product and solution information.

