

WV-U11301-F3

2MP Indoor Box Camera

2MP Indoor Box Camera



- 2MP Indoor box camera
 - Standard video motion detection using i-VMD
 - Audio recording with built-in microphone
 - Built-in FIPS 140-3 Level 3 Certified SecureElement (EdgeLock® SE052F NXP® Semiconductors)
 - NDAA Compliant
-

SPECIFICATIONS

Camera	
Image Sensor	Approx. 1/2.8 type CMOS image sensor
Scanning Area	5.57 mm (H) × 3.13 mm (V) {7/32 inches (H) × 1/8 inches (V)}
Minimum Illumination	Color : 0.07 lx (30IRE, F2.0, 1/30 s, AGC: 11)* 0.09 lx (50IRE, F2.0, 1/30 s, AGC: 11) 0.006 lx (50IRE, F2.0, 16/30 s, AGC: 11)* BW : 0.04 lx (50IRE, F2.0, 1/30 s, AGC: 11) 0.003 lx (50IRE, F2.0, 16/30 s, AGC: 11)* * Converted value
White Balance	ATW1/ ATW2/ AWC
Shutter Speed	-
Maximum Shutter	[30 fps mode] Max. 1/10000 s to Max. 16/30 s [25 fps mode] Max. 1/10000 s to Max. 16/25 s
Intelligent Auto	On/Off
Super Dynamic	On/Off (Range : 0 to 31)
Dynamic Range	Max. 120 dB (Super Dynamic: On, Level: 31)
Adaptive Black Stretch	The level can be set in the range of 0 to 255.
Back Light Compensation/High Light Compensation	Back light compensation (BLC) / High light compensation (HLC) / Off (Range : 0 to 31) *only when Super Dynamic/ Intelligent Auto: Off
Fog Compensation	On/Off (Range : 0 to 8) *only when Intelligent Auto / Auto contrast adjust: Off
Maximum Gain (AGC)	The level can be set in the range of 0 to 11.
Color/BW (ICR)	Off/ On/ Auto1(Normal)/ Auto2(IR Light)/ Auto3(SCC)
IR LED Light	-
Digital Noise Reduction	The level can be set in the range of 0 to 255.
Video Motion Detection (VMD)	On/ Off (4 areas available)
Scene Change Detection (SCD)	On/ Off (1 area available)
Audio Detection	On/ Off
AI Sound Classification	-
Analytics	i-VMD
Maximum No. of Applications	1 (Non AI app)
Privacy Zone	On/Off (Up to 8 zones available)
VIQS	On/Off (Up to 8 zones available)
Image Rotation	0° (Off)/ 90°/ 180° (Upside-down)/ 270°
Image Stabilizer	-
Lens	
Optical Zoom	-
Digital (electronic) Zoom	max 3.0x
Focal Length	3.2 mm {1/8 inches}
Angular Field of View	[16:9 mode] Horizontal: 108° Vertical: 58° [4:3 mode] Horizontal: 78° Vertical: 58°
Adjusting Angle	-
Maximum Aperture Ratio	1:2.0
Focus Range	1.0m {39-3/8 inches} – ∞
Aperture Range	F2.0
DORI	
Detect (25ppm / 8ppf)	27.9m {91.5ft}
Observe (62.5ppm / 19ppf)	11.2m {36.6ft}
Recognize (125ppm / 38ppf)	5.6m {18.3ft}
Identify (250ppm / 76ppf)	2.8m {9.2ft}
System on Chip	
System on Chip (SoC)	Ambarella S6LM
Pan/Tilt	

Panning Speed	-
Tilting Speed	-

Browser GUI	
GUI / Setup Menu Language	English, Italian, French, German, Spanish, Portuguese, Russian, Chinese, Japanese
Browser *1	Microsoft Edge, Firefox, Google Chrome

Network	
Network IF	10BASE-T/100BASE-TX, RJ45 connector
Resolution	[16:9mode(30fps mode)][16:9mode(25fps mode)] 1920x1080/1280x720/640x360/320x180 [4:3mode(30fps mode)][4:3mode(25fps mode)] 1280x960/640x480/320x240
H.265/H.264 Transmission Priority/Type	[Transmission priority] Constant bit rate/ VBR/ Frame rate/ Best effort [Transmission type] Unicast port (AUTO)/ Unicast port (MANUAL)/ Multicast
No. of Stream	4
JPEG (MJPEG) Image Quality	10 steps: 0(SUPER FINE) - 9(LOW)
Smart Coding	[GOP(Group of pictures) control] Off/ Low (Variable GOP 1s-8s)/Mid (Variable GOP 4s-16s)/ Advanced (Fixed GOP 60 seconds with 1 second Key frame)/ Frame rate control (Variable GOP 4s-16s with frame rate control) *Advanced and Frame rate control are only available with H.265. [Auto VIQS] On/ Off
Audio Compression Method *2	G.726 (ADPCM): 16 kbps/ 32 kbps G.711: 64 kbps AAC-LC *: 64 kbps/ 96 kbps/ 128 kbps
Audio Transmission Mode	Off / Mic input
Supported Protocol	IPv6: TCP/IP, UDP/IP, HTTP, HTTPS, SSL/TLS, SMTP, DNS, NTP, SNMPv1/v2/v3, DHCPv6, RTP, MLD, ICMP, ARP, IEEE 802.1X, DiffServ, FTP, SFTP, LLDP, MQTT IPv4: TCP/IP, UDP/IP, HTTP, HTTPS, SSL/TLS, RTSP, RTP, RTP/RTCP, SMTP, DHCP, DNS, DDNS, NTP, SNMPv1/v2/v3, UPnP, IGMP, ICMP, ARP, IEEE 802.1X, DiffServ, SRTP, FTP, SFTP, LLDP, MQTT
No. of Simultaneous Users	Up to 14 users (Depends on network conditions)
Secure	FIPS 140-3 level 3, CC EAL6+ (NXP® EdgeLock® SE052F), Device Certificate GlobalSign® pre-installed, HTTPS, User authentication, digest authentication, Host authentication, IEEE802.1X, System log, Image transmission log, brute-force protection, Alteration Detection, Secure boot, Signed firmware
SDXC/SDHC/SD Memory Card (Option)	microSDXC memory card: 64 GB, 128 GB, 256 GB, 512 GB microSDHC memory card: 4 GB, 8 GB, 16 GB, 32 GB microSD memory card: 2 GB
Mobile Terminal Compatibility	iPad / iPhone (iOS 8.0 or later), Android™ terminals
ONVIF@Profile	G / S / T

Alarm	
Alarm Source	VMD alarm, SCD alarm, Command alarm, Audio detection alarm
Alarm Actions	SDXC/SDHC/SD memory recording, E-mail notification, HTTP alarm notification Indication on browser, TCP alarm notification output

Input/Output	
Built-in Microphone	Nondirectional electret condenser microphone

General	
Safety	UL62368-1 3Ed, CAN/CSA C22.2 NO.62368-1-19
EMC	FCC Part15 Subpart B, ClassA, SDoC, ICES-003 Issue 7 ClassA, EN55032:2015/A11 ClassA, EN55035:2017/A11
Power Source / Power Consumption *3	PoE (IEEE802.3af Compliant) PoE DC 48 V : 140 mA / Approx. 6.7 W (Class 0 device)
Ambient Operating Temperature	-10 °C to +50 °C {+14 °F to +122 °F}
Ambient Operating Humidity	10 % to 90 % (no condensation)
Dimensions	59 mm (W) x 49 mm (H) x 142mm (D) (2-5/16 inches (W) x 1-15/16 inches (H) x 5-19/32 inches (D)) (excluding projection)
Mass (approx.)	Approx. 250 g {0.56 lbs}
Finish	Main body: PC resin, i-PRO white
Easy Kitting	Supported

NOTES

*1 For information on the operation verification of the web browsers, refer to our support website <Control No.: C0132>.

*2 When recording audio on an SD memory card, only use AAC-LC (Advanced Audio Coding - Low Complexity) .

*3 Refer to our technical information website <Control No.: C0106> for further information about Power source and Power consumption information..

Important

- Safety Precautions: Carefully read the Basic Information,Installation Guide and Operating Instructions before using this product.
- i-PRO Co., Ltd. cannot be held responsible for the performance of the network and/or any third-party products (including applications) used on the network.
- Masses and dimensions are approximate.
- Specifications are subject to change without notice.

Trademarks and registered trademarks

- iPad and iPhone are trademarks of Apple Inc., registered in the U.S. and other countries. – Android is a trademark of Google LLC.
- ONVIF is a trademark of ONVIF, Inc.
- All other trademarks identified herein are the property of their respective owners

©i-PRO Co., Ltd All rights reserved / September 2025

OPTIONAL ACCESSORIES

Select a compatible accessory
[Accessory Selector \(i-pro.com\)](#)



WV-QLR100-W
Light Rail Mount Bracket



WV-QCL102-W
Universal Camera Mount Bracket



WV-SDB128G
i-PRO SD Memory Card



WV-SDB064G
i-PRO SD Memory Card



WV-SDB032G
i-PRO SD Memory Card



WJ-PU201P
PoE Injector




WJ-PU201F/G
PoE Injector



WJ-PU201/G
PoE Injector

APPEARANCE

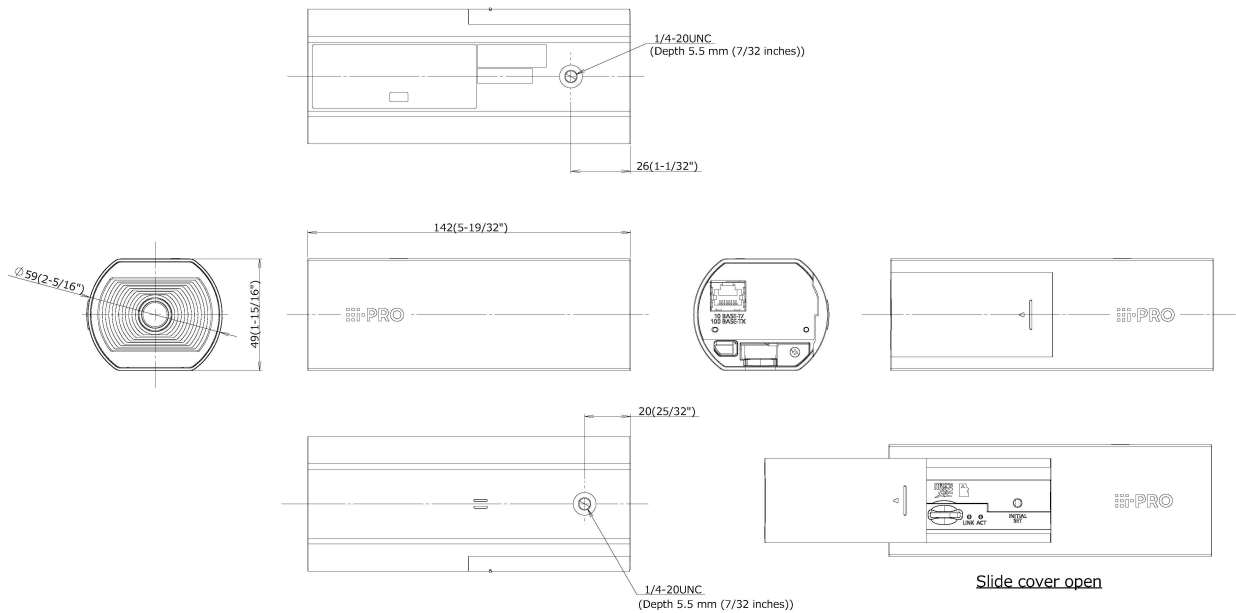

Mass : Approx. 250 g {0.56 lbs}

