


CODE: **AWO270** v1.2/VI
 NAME: **17/EIZ75/SATEL/GRADE 3**

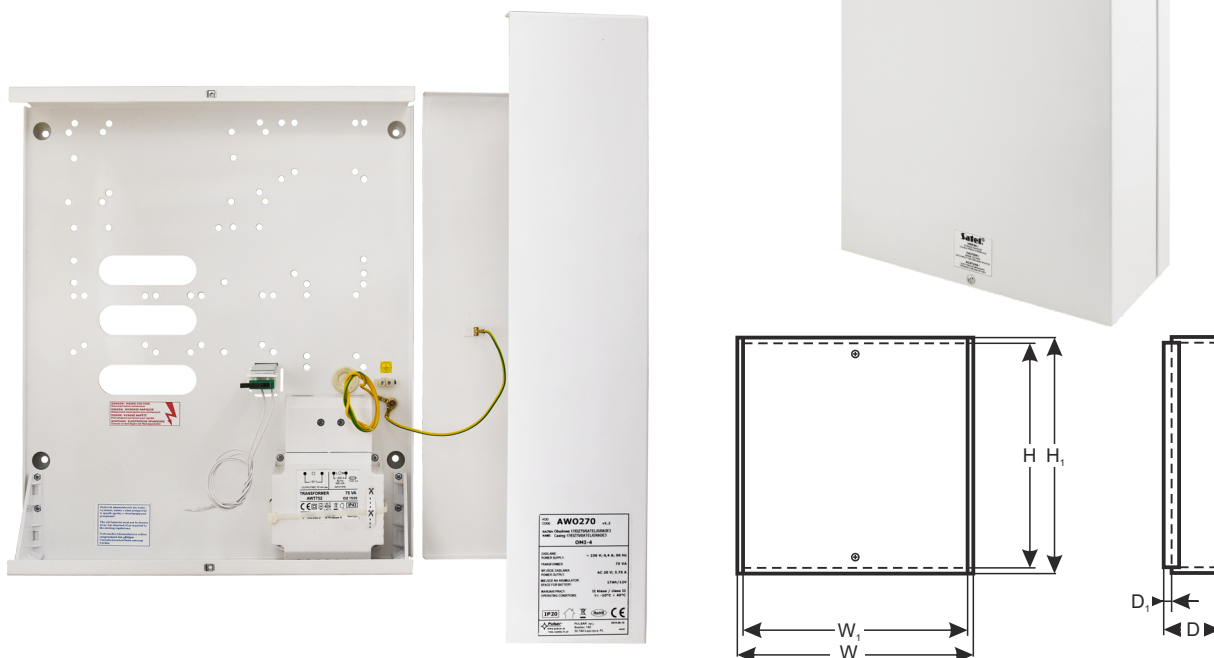

DESTINATION

SATEL:

- 1) CA6,10, VERSA 5,10,15, INTEGRA 24,32 + 4x CA10E (CA64E, SM, MST1)
- 2) CA6,10, VERSA 5,10,15, INTEGRA 24, 32 + 3 x CA10E (CA64E, SM, MST1) + CA64 (EPS, O-OC, O- ROC, O-R, VGM- 16, SR, ADR, ACC-KP-PS)
- 3) CA 6, 10, VERSA 5,10,15, INTEGRA 24, 32 + CA64 (E, SM, MST1) + 2 x CA64 (EPS, O-OC, O- ROC, O-R, VGM- 16, SR, ADR, ACC- KP- PS)
- 4) INTEGRA 64, 128 + 3 x CA64E (CA10E, SM, MST1)
- 5) INTEGRA 64, 128 + CA64E (CA10E, SM, MST1) + CA64 (EPS, O- OC, O-ROC, O-R, VGM- 16, SR, ADR, ACC- KP- PS)

MODULES:

- 1) CA64 (PP, OPS- OC, OPS-R, OPS- ROC, EPS, O-OC, O-ROC, O-R, VGM- 16, SR, ADR, ACC- KP-PS) + 4 x CA64E (CA10E, SM, MST1)
- 2) CA64 (PP, OPS-OC, OPS-R, OPS-ROC) + CA64 (EPS, O-OC, O-ROC, O-R, VGM16, SR, ADR, ACC- KP-PS) + 3 x CA64E (CA10E, SM, MST1)
- 3) 2 x CA64 (EPS, O-OC, O-ROC, O-R, VGM- 16, SR, ADR, ACC- KP-PS) + 3 x CA64E (CA10E, SM, MST1)
- 4) ACCO-KPWG-PS

TECHNICAL DATA

External dimensions of the enclosure:	W=340, H=400, D=110 D ₁ =15 [+/- 2mm]
External dimensions of the front panel:	W ₁ =335, H ₁ =405 [+/- 2mm]
Weight net/gross:	5,20kg / 5,50kg [+/-0,1kg]
Battery space:	17 Ah/12 V Sealed Lead Acid (SLA)
Transformer:	TRZ 75 VA/20 V in the case of PC/ABC in class UL94-V0, IP43
Power supply:	~230 V (-15%/+10%), 50 Hz, 400 mA (max.)
Power supply output:	U ₁ =20 V AC (-5%, +15%), I ₁ =3,75 A (max.)
Operating environment:	class II, -10°C+ 40°C
Material description:	sheet steel DC01, thickness: 1,0mm, protection anticorrosion, color: RAL 9003
Destination:	indoor
Tamper protection:	opening or removal from wall, 0,5 A@50 V DC max. NC/NO contacts
Closing:	screwed x 2, (screwed for front casing)
Notes:	distance from wall (mounting surface) - 15mm, easy door removal
Declaration, warranty:	CE, CLC/TS 50131-3:2003, 2 year from the production date