


CODE: **AWO306 v1.2/V**
 NAME: **28/TRP80/SATEL/GRADE 3**

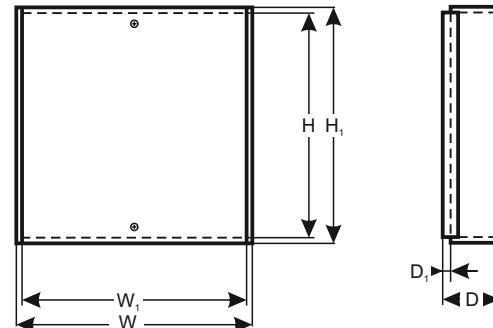

DESTINATION

Z 17Ah / 28Ah:

- 1) INTEGRA64, INTEGRA128, INTEGRA256 + 11x CA-64E (CA-64SM, INT-RS, INT-FI, INT-VG, GPRS-T1)
- 2) INTEGRA64, INTEGRA128, INTEGRA256 + 2x CA-64PP (CA-64 OPS-OC, CA-64 OPS-R, CA-64 OPS-ROC) + 5x CA-64E (CA-64SM, INT-RS, INT-FI, INT-VG, GPRS-T1)
- 3) INTEGRA64, INTEGRA128, INTEGRA256 + 4x CA-64EPS (CA-64 O, CA-64 ADR, CA-64 SR, CA-64 DR, VGM16, ETHM-1) + CA-64E (CA-64SM, INT-RS, INT-FI, INT-VG, GPRS-T1)
- 4) INTEGRA64, INTEGRA128, INTEGRA256 + 1x GSM4 (GSM5, GSM LT-1/LT2) + 9x CA-64E (CA-64SM, INT-RS, INT-FI, INT-VG, GPRS-T1)
- 5) INTEGRA24, INTEGRA32 + 13x CA-64E (CA-64SM, INT-RS, INT-FI, INT-VG, GPRS-T1)
- 6) INTEGRA24, INTEGRA32 + 2x CA-64PP (CA-64 OPS-OC, CA-64 OPS-R, CA-64 OPS-ROC) + 7x CA-64E (CA-64SM, INT-RS, INT-FI, INT-VG, GPRS-T1)
- 7) INTEGRA24, INTEGRA32 + 4x CA-64EPS (CA-64 O, CA-64 ADR, CA-64 SR, CA-64 DR, VGM16, ETHM-1) + 3x CA-64E (CA-64SM, INT-RS, INT-FI, INT-VG, GPRS-T1)
- 8) INTEGRA24, INTEGRA32 + 1x GSM4 (GSM5, GSM LT-1/LT2) + 11x CA-64E (CA-64SM, INT-RS, INT-FI, INT-VG, GPRS-T1)

Modules:

- 1) 2x GSM4(GSM5) + 11x CA-64E (CA-64SM, INT-RS, INT-FI, INT-VG, GPRS-T1)
- 2) 5x CA-64EPS (CA-64 O, CA-64 ADR, CA-64 SR, CA-64 DR, VGM16, ETHM-1) + 3x CA-64E (CA-64SM, INT-RS, INT-FI, INT-VG, GPRS-T1)
- 3) 3x CA-64PP (CA-64 OPS-OC, CA-64 OPS-R, CA-64 OPS-ROC) + 7x CA-64E (CA-64SM, INT-RS, INT-FI, INT-VG, GPRS-T1)

TECHNICAL DATA

External dimensions of the enclosure: W=460, H=550, D₁=20 [+/- 2mm]

External dimensions of the front panel: W₁=455, H₁=555 [+/- 2mm]

Weight net/gross: 9,30kg / 9,60kg [+/- 0,1kg]

Power supply: 230 V, 50 Hz (-/+15%)

Battery space: 28 Ah/12 V

Transformer: TRP 80/16V/18V/20 in the case of PC/ABC in class UL94-V0, IP30

Output current TAMPER - max: 500mA@50 V DC

Operating environment: class II, -10°C+ 40°C

Material description: sheet steel DC01, thickness: 1,0mm, protection anticorrosion, color: RAL 9003

Destination: indoor

Tamper protection: enclosure is equipped with set including mounting bracket with tamper

Closing: screwed

Notes: distance from wall (mounting sourface) - 20mm, easy door removal, hole for pigtail

Declaration, warranty: CE, CLC/TS 50131-3:2003,
 2 year from the production date