

# **TURBO-RAID System Recorder**

H.265/H.264 high-throughput and scalable embedded recorder featuring integrated GUI and robust embedded IP security enabling a secure end-to-end PC-less surveillance solution for mission-critical applications.

Supports full data encryption streaming recording for all i-PRO camera which comply to FIPS 140-2 CAVT\* to keep your video secured from spoofing and snooping activities. \*Using encryption module standardized by FIPS publication 140-2

# Secure high bandwidth recording

- 16 ch. expandable to 32 ch. camera input. Support H.265 / H.264 mixed recordings.
- 512 Mbps total through put (including 256 Mbps recording bandwidth)
- Pre-installed device certificates \*Secure Communication Kits are necessary.

## PC-less non-VMS surveillance solution

- No camera license fees with a default number of cameras; no annual license updates required.
- Built-in GUI and Dual HDMI (4K / FHD) outputs
- Automatic camera configuration

# Scalable storage

- (4) integrated drive-bays RAID 1 / 5 / 6 \*Additional RAID Kit license is necessary to use the RAID feature.
- External storage expansion up to 176 TB

## High reliability and high efficiency data reading/writing

- Dynamic HDD power management increases HDD life
- TURBO-RAID for quick RAID recovery without sacrificing recording bandwidth and performance
- Eco-writing: Acceleration of data access (reading / writing) by original file system
- Instantaneous power failure measures: Normal operation at instantaneous power failure within 200 ms; safe shutdown at power failure of 200 ms or more.

## **Industry examples**

- Public safety (City / Road / Highway / Port)
- Transportation (Airport / Train / Subway)
- Bank / Retail
- Hospital / Education
- Factory










#### Specifications


Supported	Compatible vendor	i-PRO series Network cameras, ONVIF NVT conformant camera and encode
Camera	Supported Image Format	H.265(HEVC), H.264, JPEG
	Supported Image Resolution	<ul> <li>Aspect ratio [4:3] 4000x3000, 3072x2304, 2560x1920, 2048x1536, 1600x1200, 1280x960, 800x600, 640x48</li> </ul>
	(Depending on the camera)	•Aspect ratio [16:9] 3840x2160, 3072x1728, 2560x1440, 1920x1080, 1280x720, 640x36
		•Aspect ratio [1:1] 2992x2992, 2816x2816, 2192x2192, 2048x2048, 1280x128
		•Aspect ratio [9:16] 2160x3840, 1728x3072, 1440x2560, 1080x1920, 720x1280, 360x64
	Supported Audio Format	G.711 for Onvif, G.726 (ADPCM) 32 kbps, AAC-LC
	Maximum Number of Cameras	MAX. 32*1 (Default number of cameras : 16)
	Recording Mode	Event, Schedule, Emergency
	•	
	Pre-alarm Recording	Up to 15 seconds "When the delivery speed from the network camera is less than 4 Mbps
	Sub-stream Recording	64 / 128 / 256 / 384 / 512 / 768 kbps
	Scheduled Recording Mode	16 programs, 6 time zones/day, Independent setup for each day of the week
	Frame Rate/Camera	Up to 60 fps (Depending on the camera)
Main Unit	Camera Control	Pan/Tilt, Zoom, Focus, Brightness, Preset position call and program (up to 256
Functions		Auto mode, Click centering, Wheel zoom, Zoom reset, Auto Back Focus,
		Aux, Wiper (for WV-SUD638)
	Multiscreen Mode	[Main monitor]
		Control screen 4 / 9 / 16 split screen display
		<ul> <li>Wide view screen 2/3/4/5/6/7/9/12/16/24/32 split screen display</li> </ul>
		1 screen sequence, 4 / 9 / 16 split screen sequence
		[Sub monitor]
		1/4/9/16/24/32 split screen display, 1 screen sequence, 4/9/16 split screen sequenc
	Playback Control	PLAY, Rev PLAY, Pause, Stop, FF, FR, Prev Record, Next Record,
	riayback Control	Prev Image, Next Image, Go to Date, Go to Last (30 s), Time-saving playbac
	Search Mode	Search criteria: Time date, Playback by designating a timeline, VMD, Thumbnai
	Сору	File Format: Original Format / MP4
		Recorded data of selected cameras and time date range can be copied to USB storage
	Camera Title	Up to 16 Characters
	Clock Display	Time: 12H/24H, Date: 5 formats
	Digital Zoom	Live / Play: 1.25x 1.5x 1.75x, 2x, 2.5x, 3x, 3.5x 4x, 5x, 6x, 7x, 8x (only for 1-screen or 4-scree
	System Log	Operator access (500), Network error (100), Error (1,000), Event (1000), Operation (500)
	System Setup	Setup page in English, French, Italian, Spanish, German, Russian,
		Portuguese, Thai, Simplified Chinese, Traditional Chinese, Japanese
	360 Camera Dewarp	Only 1ch display mode.
	re-encoding	2Client
	SD Memory Data Download	Images recorded in the SD card in the i-PRO series cameras can be
	,	transferred to the recorder automatically. (H.265/H.264)
Browser	Camera Control	Pan/Tilt, Zoom, Focus, Brightness, Preset position call and program (up to 256
GUI	Carriora Cornaci	Auto mode, Click centering, Wheel zoom, Zoom reset, , Aux, Wiper (for WV-SUD638
	Playback Control	PLAY, Rev PLAY, Pause, Stop, FF, FR, Prev Record, Next Record,
	riayback Control	
	0 114 1	Prev Image, Next Image, Go to Date, Go to Last (30 s)
	Search Mode	Search criteria: Time date, Event type, VMD, Camera number
	Display Mode	1 / 4 screen
	Image Download	File Format: Original Format / MP4
		Recorded data of selected camera and time range can be downloaded to a PC
		Viewer software can be downloaded separately.
	Сору	File Format: Original Format / MP4
		Recorded data of selected cameras and time date range can be copied to USB storage
	Camera Title	Up to 16 characters
	Clock Display	On the browser. Time: 12H/24H, Date: 5 formats
	Alarm Control	Reset
	Digital Zoom	Live/Play: 2x, 4x (only for 1-screen)
	System Log	Operator access (500), Network error (100), Error (1,000), Event (1000), Operation (50)
	GUI Language	Setup page in English, French, Italian, Spanish, German, Russian, Portuguese
		Thai, Simplified Chinese, Traditional Chinese, Japanese
	Required PC	CPU: Intel <sup>®</sup> Core™ i7-860 or faster, RAM : 4 GB or more,
	Required PC	VRAM: 128 MB or more (Min. 64 MB), Microsoft® DirectX® 9.0c or later
Alarm/	Alarm Source	VRAM: 128 MB or more (Min. 64 MB), Microsoft® DirectX® 9.0c or later 9x Terminal inputs, 32x Camera alarms (TCP alarm notification), 128x Command alarm
Alarm/ Event		CPU: Intel® Core™ i7-860 or faster, RAM: 4 GB or more, VRAM: 128 MB or more (Min. 64 MB), Microsoft® DirectX® 9.0c or later 9x Terminal inputs, 32x Camera alarms (TCP alarm notification), 128x Command alarm Off / On
	Alarm Source	VRAM: 128 MB or more (Min. 64 MB), Microsoft® DirectX® 9.0c or later 9x Terminal inputs, 32x Camera alarms (TCP alarm notification), 128x Command alarm
	Alarm Source Event Mode	VRAM: 128 MB or more (Min. 64 MB), Microsoft® DirectX® 9.0c or later 9x Terminal inputs, 32x Camera alarms (TCP alarm notification), 128x Command alarm Off / On

## **Appearance**

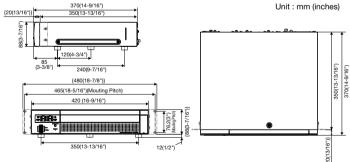

#### Important

- Safety Precautions : Carefully read the Basic Information, Installation Guide and Operating Instructions before using this product.
- i-PRO Co., Ltd. cannot be held responsible for the performance
- of the network and/or other manufacturers' products used on the network.

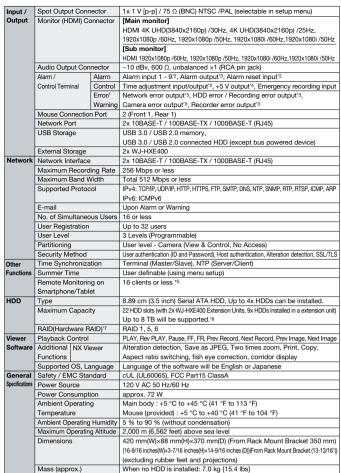

- \*1 Two Additional Camera Kit WJ-NXE30W are necessary.
- Non-voltage make contact input, 4:3.3 V pull-up Approx. 23 kΩ
   3 Open collector output, 24 V DC, -200 mA max.
   4 +5V ±0.5 V 200 mA max.
   i-PRO Mobile APP is required on smartphone/tablet PC.
- Rease check the following URL for the latest information.
   (https://i-pro.com/global/en/surveillance/training-support/documentation-database-list)
   Additional RAID Kit WJ-NXR30W is necessary.

## **Optional Accessories**



### Additional RAID Kit WJ-NXR30W

WJ-NXR30W is a license kit intended to improve the usefulness of Network Disk Recorder WJ-NX300. After registering the WJ-NXR30W into WJ-NX300, WJ-NX300 is enabled RAID functions.

#### **Additional Camera Kit**

Number of cameras used in the system can be increased to 32 (maximum) by purchasing the Additional Camera Kit (WJ-NXE30W: license for 8 cameras.)

#### Secure Communication Kits

The Secure Communication Kits are license kits to use the security function of the network disk recorder. Each Secure Communication Kit allows the following number of cameras to be registered. WJ-NXS01W: 1 camera | WJ-NXS04W: 4 cameras | WJ-NXS16W: 16 cameras | WJ-NXS32W: 32 cameras

## Trademarks and registered trademarks

- All other trademarks identified herein are the property of their respective owners.
- Masses and dimensions are approximate. Specifications are subject to change without notice.

