## :::·PRO

# WV-S4156

5MP Indoor 360 Fisheye Network Camera with AI engine

# Edge AI 360-degree fisheye camera that provides video surveillance without any blind spots and business intelligence.



- 2192x2192 pixel fisheye images up to 30fps
- Intelligent Auto (with AI Engine)
- Super Dynamic 120dB
- Smart Coding (with AI Engine)
- NDAA Compliant



# **SPECIFICATIONS**

Camera	
Image Sensor	Approx. 1/3 type 5MP CMOS image sensor
Minimum Illumination	Color : 0.15 lx, BW : 0.1 lx (F2.4, Maximum shutter : Off (1/30 s), AGC : 11) Color : 0.01 lx, BW : 0.006 lx (F2.4, Maximum shutter : max. 16/30s, AGC : 11)
Intelligent Auto	On / Off
Maximum Shutter	max. 16/30s to Max. 1/10000s
Super Dynamic	On / Off, The level can be set in the range of 0 to 31.
Dynamic Range	Max.120 dB (Super Dynamic : On, level : 31)
Image Settings	Gain (AGC), White balance
Image Compensation	Adaptive black stretch, Back light compensation (BLC), Fog compensation, High light compensation (HLC), Digital noise reduction
Day / Night (Electrical)	Off / Auto
Video Motion Detection (VMD)	On / Off, 4 areas available
Scene Change Detection (SCD)	On / Off, 1 areas available
Audio Detection	On / Off
AI Sound Classification	Gunshot, Yell, Vehicle horn, Glass break
Al Analytics	AI-VMD/AI People Counting for 360-degree fisheye camera, AI Privacy Guard for 360- degree fisheye camera, AI Scene Change Detection, AI Scene Change Detection For details https://i-pro.com/global/en/surveillance/products/i-pro-ai-application 3rd party applications are also available. https://i-pro.com/global/en/surveillance/i-pro-application-platform/application-list
Privacy Zone	On / Off, Up to 8 zones available
Camera Title (OSD)	On / Off, Up to 20 characters (alphanumeric characters, marks)
Fixing angle adjustment	-5°, 0°, +5°
Lens	
Zoom Ratio	1x
Digital (Electronic) Zoom	Choose from 3 levels of x1, x2, x4
Focal Length	0.84 mm {1/32 inches}
Maximum Aperture Ratio	1:2.4
Focus Range	0.3 m {11-13/16 inches} - ∞
Angular Field of View	Horizontal : 186° Vertical : 186°
DORI	
Distance to the object in the center of the image	Detect (25 ppm / 8 ppf) : 20.7 m / 68.0 ft , Observe (62.5 ppm / 19 ppf) : 8.3 m / 27.2 ft Recognize (125 ppm / 38 ppf): 4.1 m / 13.6 ft , Identify (250 ppm / 76 ppf) : 2.1 m / 6.8 ft
Coverage radius when mounted at a height of 3 m (10 ft)	Detect (25 ppm / 8 ppf) : 38.0 m / 124.6 ft , Observe (62.5 ppm / 19 ppf) : 13.2 m / 43.3 ft Recognize (125 ppm / 38 ppf): 4.3 m / 14.1 ft , Identify (250 ppm / 76 ppf) : —

Brightness, AUX On / Off
Mic (Line) Input : On / Off Volume adjustment : Low / Middle / High Audio Output : On / Off Volume adjustment : Low / Middle / High
English, Italian, French, German, Spanish, Portuguese, Russian, Chinese, Japanese
10Base-T / 100Base-TX, RJ45 connector
<ul> <li>Fisheye mode (max. 30 fps/25 fps)</li> <li>2192×2192 / 1280×1280 / 640×640 / 320×320</li> <li>Quad PTZ mode (max. 30 fps/25 fps), Single PTZ mode (max. 30 fps/25 fps)</li> <li>1600×1200 / 1280×960 / 800×600 / VGA / QVGA</li> </ul>
<ul> <li>Double Panorama mode (max. 30 fps/25 fps)</li> <li>1920×1080 / 1280×720 / 640×360 / 320×180</li> <li>Fisheye + Double Panorama mode (max. 30 fps/25 fps)</li> <li>(Fisheye) 2192×2192 / 1280×1280 / 640×640 / 320×320</li> <li>(Double Panorama) 1280×720 / 640×360 / 320×180</li> <li>Fisheye + Quad PTZ mode (max. 30 fps/25 fps)</li> <li>(Fisheye) 2192×2192 / 1280×1280 / 640×640 / 320×320</li> <li>(Quad PTZ) 1280×960 / 800×600 / VGA / QVGA</li> <li>Quad streams mode</li> <li>(Single PTZ (Quad streams)) 1280×960 / 800×600 / VGA / QVGA (max. 30 fps/25 fps)</li> <li>(Quad PTZ) 1600×1200 / 1280×960 / 800×600 / VGA / QVGA (max. 5 fps)</li> </ul>
<ul> <li>Panorama mode (max. 30 fps/25 fps)</li> <li>1920×1080 / 1280×720 / 640×360 / 320×180</li> <li>Fisheye + Panorama mode (max. 30 fps/25 fps)</li> <li>(Fisheye) 2192×2192 / 1280×1280 / 640×640 / 320×320</li> <li>(Panorama) 1280×720 / 640×360 / 320×180</li> </ul>
[Transmission Mode] Constant bit rate / VBR / Frame rate / Best effort [Transmission Type] Unicast port (AUTO) / Unicast port (MANUAL) / Multicast
[Image Quality] 10 steps
GOP (Group of pictures) control : On (Frame rate control)* / On (Advanced)* / On (Mid) / On (Low) / Off *On (Frame rate control) and On (Advanced) are only available with H.265. Auto VIQS : On / Off
G.726 (ADPCM) : 16 kbps / 32 kbps G.711 : 64 kbps AAC-LC : 64 kbps / 96 kbps / 128 kbps
IPv6 : TCP/IP, UDP/IP, HTTP, HTTPS, SSL/TLS, SMTP, DNS, NTP, SNMP v1/v2/v3, DHCPv6, RTP, MLD, ICMP, ARP, IEEE 802.1X, DiffServ IPv4 : TCP/IP, UDP/IP, HTTP, HTTPS, SSL/TLS, RTSP, RTP, RTP/RTCP, SMTP, DHCP, DNS, DDNS, NTP, SNMP v1/v2/v3, UPnP, IGMP, ICMP, ARP, IEEE 802.1X, DiffServ, SRTP
Up to 14 users (Depends on network conditions)
Device Certificate GlobalSign® pre-installed, User authentication, Host authentication, HTTPS, 802.1X Support, Data encryption
H.265 / H.264 recording : Manual REC / Alarm REC (Pre/Post) / Schedule REC JPEG recording : Manual REC / Alarm REC (Pre/Post) Compatible SDXC/SDHC/SD card : 2 GB, 4 GB*, 8 GB*, 16 GB*, 32 GB*, 64 GB**, 128 GB**, 256 GB**, 512 GB**model *SDHC card, ** SDXC card (except miniSD card and microSD card)
iPad / iPhone, AndroidTM terminals
G / M / S / T
2 terminals input VMD. Command alarm
3 terminals input, VMD, Command alarm
SDXC/SDHC/SD memory recording, E-mail notification,

Input/Output	
Audio Input	ø3.5 mm stereo mini jack, Recommended applicable microphone : Plug-in power type (Sensitivity of microphone : –48 dB ±3 dB (0 dB=1 V / Pa,1 kHz)) Input impedance : Approx. 2 k $\Omega$ (unbalanced) Supply voltage : 2.5 V ±0.5 V
Built-in microphone	Nondirectional electret condenser microphone
Audio Output	ø3.5 mm stereo mini jack (monaural output) Output impedance : Approx. 600 $\Omega$ (unbalanced) Output level : –20 dBV
External I/O Terminals	ALARM IN 1 (Auto time adjustment) (x1), ALARM IN 2 (ALARM OUT) (x1), ALARM IN 3 (AUX OUT) (x1)
General	
Safety	UL (UL62368-1), c-UL (CSA C22.2 No.62368-1), CE, IEC62368-1
EMC	FCC (Part15 ClassA), ICES003 ClassA, EN55032 ClassB, EN55024, EN55035
Power Source and Power Consumption	DC power supply : DC12 V 520 mA, Approx. 6.2 W PoE (IEEE802.3af compliant) Device : DC48 V 140 mA, Approx. 6.7 W (Class 0 device)
Ambient Operating Temperature	-10 °C to +50 °C (14 °F to 122 °F)
Ambient Operating Humidity	10% to 90 % (no condensation)
Dimensions	ø150 mm × 50.5 mm (H) {ø5-29/32 inches × 2 inches (H)}
Mass (Approx.)	Approx. 390 g {0.86 lbs}
Finish	Main body : ABS resin, i-PRO white

## NOTES

Important

- Safety Precautions : Carefully read the Basic Information, Installation Guide and Operating Instructions before using this product.

- i-PRO Co., Ltd. cannot be held responsible for the performance of the network and/or other manufacturers' products used on the network.

- Masses and dimensions are approximate.

- Specifications are subject to change without notice.

Trademarks and registered trademarks

- iPad and iPhone are trademarks of Apple Inc., registered in the U.S.and other countries.
 - Android is a trademark of Google LLC.
 - ONVIF is a trademark of ONVIF, Inc.

- All other trademarks identified herein are the property of their respective owners

©i-PRO Co., Ltd All rights reserved / November 2022

## AI-VMD/AI People Counting with the 360-degree fisheye camera

#### AI Video Motion Detection


- Al differentiates between vehicles and people, detecting and sending warning notifications when an intruder enters a specified area.
- Intruder detection:
- Issues an alarm when a moving object enters a specified area.
- Cross Line detection: Issues an alarm when an object moving in the specified direction crosses a specified threshold.
- Loitering detection:
- Issues an alarm when a moving object enters a specified area and stays there for a specified amount of time.




#### **People Counting**

#### • Cross Line Counting:

- Counts the number of people moving in a specified direction and cross a specified threshold.
- Area Counting(Queue Management):
- Counts the number of people in the set area.






**Cross Line Counting** 

Area Counting

#### **Occupancy detection**

- Heat map
- · Heat mapping provides statistical information about traffic flow and keeps counts for people passing through and loitering in the area.





Loitering



The network camera uses its AI engine to detect congestion, providing data that

can be used to direct visitor traffic flow in advance or help staff work more efficiently.

### Al Privacy Guard for 360-degree fisheye

#### Al Privacy Guard

• Al can automatically mosaic faces and figures of people who are photographed to safeguard privacy and portrait rights.



Original image




Processed image

## For Global


#### i-PRO Active Guard

• The i-PRO Active Guard stores the best images and metadata captured by i-PRO network cameras, then collates this data with the watch list registered in the client software and issues an alarm when a match is found. The server does not require expensive hardware because i-PRO network cameras handle the advanced processing. The server can even be installed on the same hardware as the VMS. The system comprises the i-PRO Active Guard, the AI application installed on i-PRO network cameras utilizing AI engines, and i-PRO Active Guard Plug-in software for the VMS client.

#### Example of basic system connection (without i-PRO Active Guard)

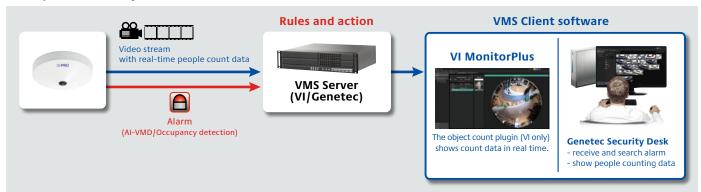


#### Example of basic system connection (with i-PRO Active Guard) for Video Insight/Genetec

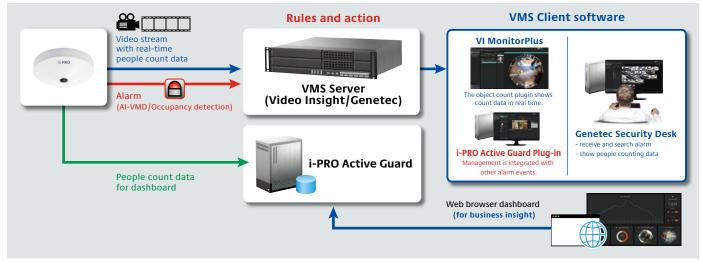

\*VMS Server and i-PRO Active Guard can be installed on the same server.

#### Example of basic system connection for WV-ASM300W/Network disk recorder

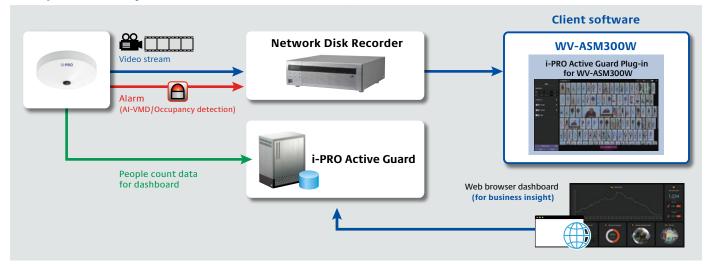

# **OPTIONAL ACCESSORIES**

Select a compatible accessory Accessory Selector (i-pro.com)





WV-QWL500-W Mount Bracket

WV-QJB500-W Mount Bracket



WV-Q105A Mount Bracket



WV-QCL102-W Universal Camera Mount Bracket



WV-QPL500-W Mount Bracket



WV-QLR100-W Light Rail Mount Bracket



WV-QCN500-W


Mount Bracket



WV-QCL100-W Mount Bracket



WV-QCL101-W Mount Bracket

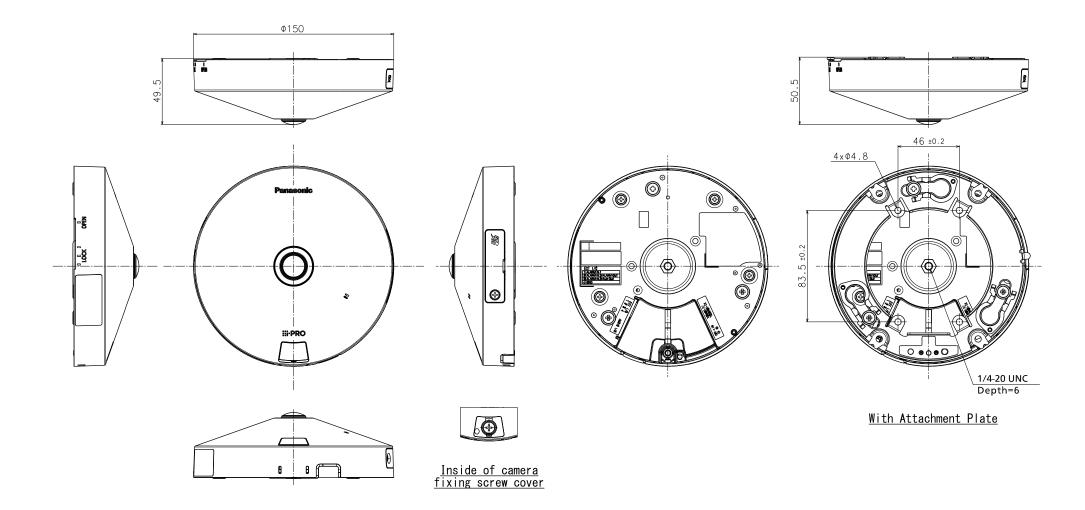

Mass : Approx. 390 g {0.86 lbs} (When using the attachment plate)